




PolyComp
LEADERS IN LED DISPLAYS


RGB PERIMETER DISPLAYS
PRODUCT OVERVIEW



TECHNICAL INFORMATION

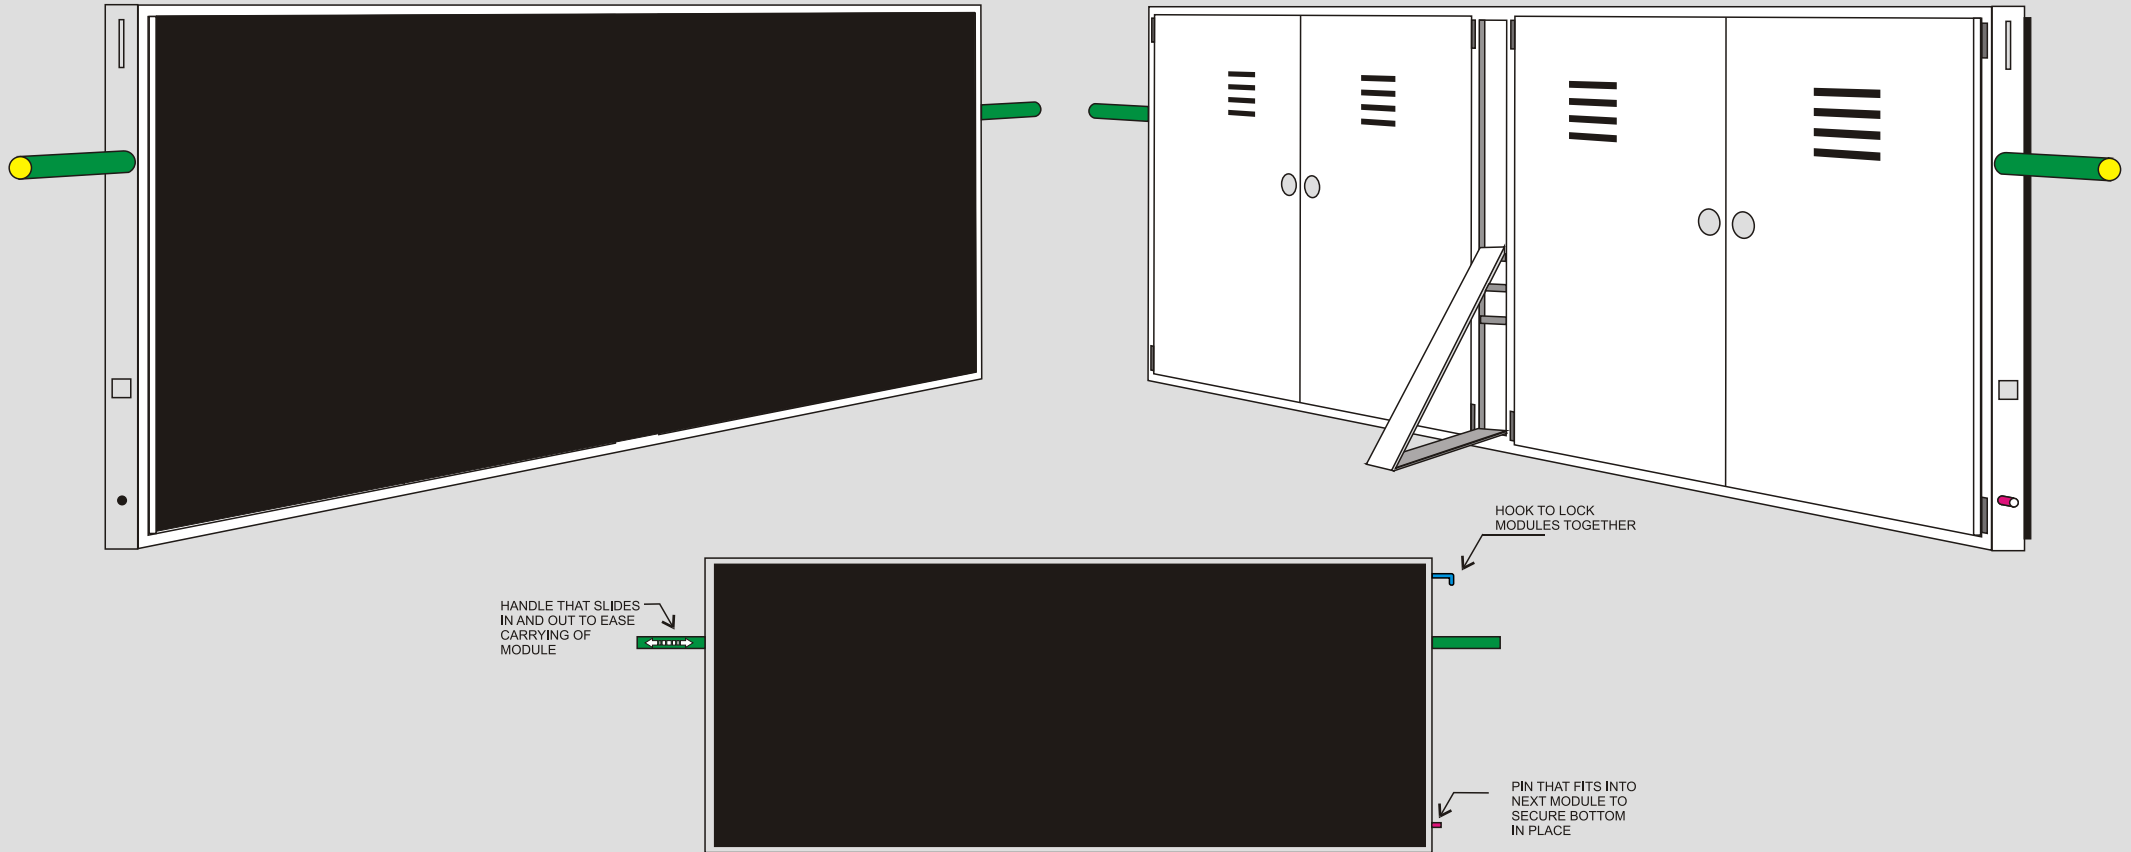

MODULES CAN BE LOCKED TOGETHER TO FORM A PARAMETER DISPLAY AS SEEN AT STADIUMS

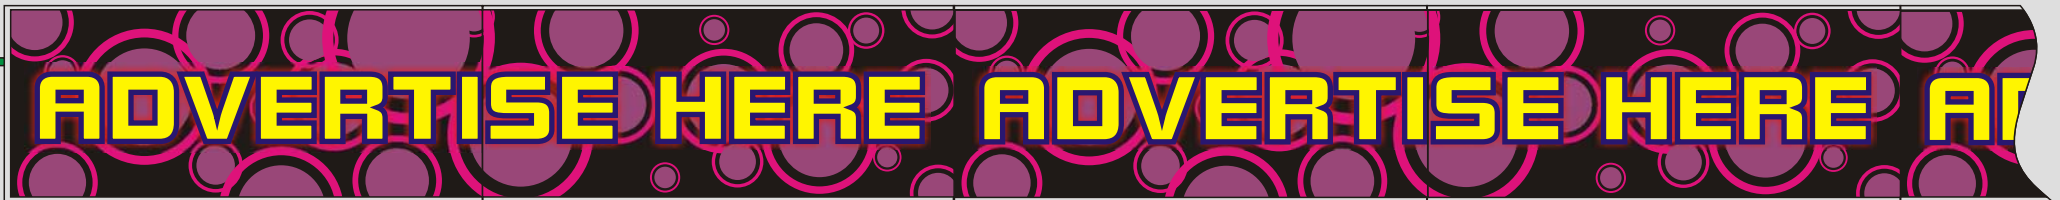

PolyComp (PTY) Ltd has been market leaders in the design and manufacturing of high quality LED displays since 1985
We are the suppliers of choice to most European, African and Asian Markets.

52 Angus Crescent, Longmeadow Business Park East, Modderfontein South Africa
Tel: +27 11 608-2770 Email: admin@polycomp.co.za
Fax: +27 11 608-2774 Websites: www.polycomp.co.za, www.polycomp-displays.com


TECHNICAL INFORMATION

HOOK TO LOCK
MODULES TOGETHER

HANDLE THAT SLIDES
IN AND OUT TO EASE
CARRYING OF
MODULE

PIN THAT FITS INTO
NEXT MODULE TO
SECURE BOTTOM
IN PLACE

CAN BE ADJUSTED
TO SUITABLE
VIEWING ANGLE

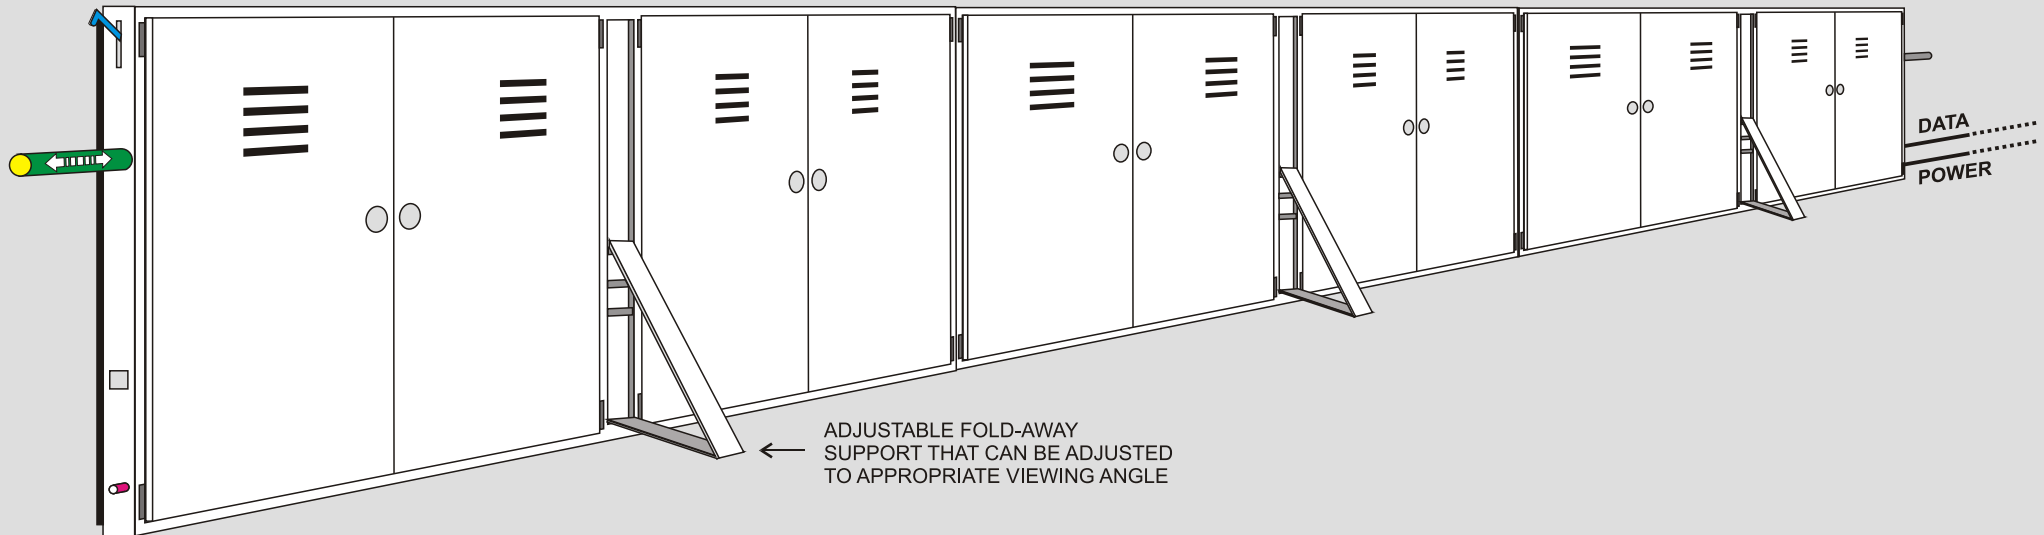



PolyComp (PTY) Ltd has been market leaders in the design and manufacturing of high quality LED displays since 1985
We are the suppliers of choice to most European, African and Asian Markets.

52 Angus Crescent, Longmeadow Business Park East, Modderfontein South Africa
Tel: +27 11 608-2770 Email: admin@polycomp.co.za
Fax: +27 11 608-2774 Websites: www.polycomp.co.za, www.polycomp-displays.com



TECHNICAL INFORMATION

SECURING THE RGB MODULES TO EACH OTHER FROM THE SIDES

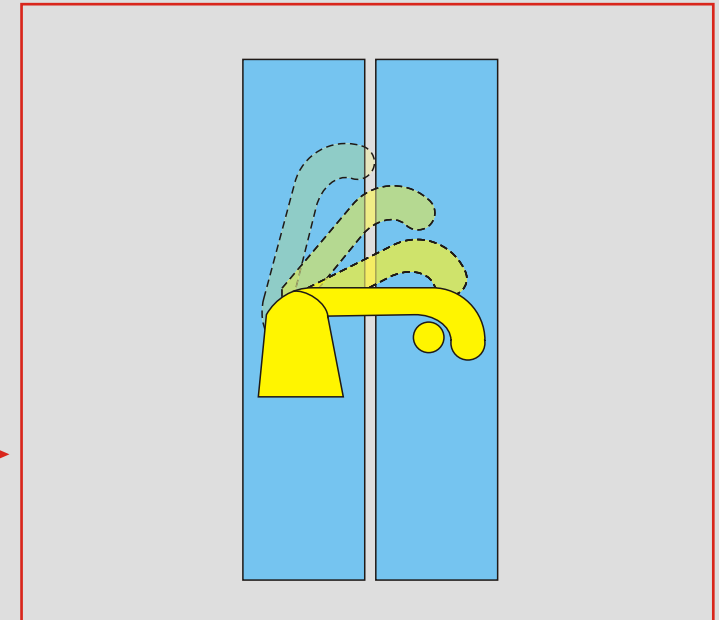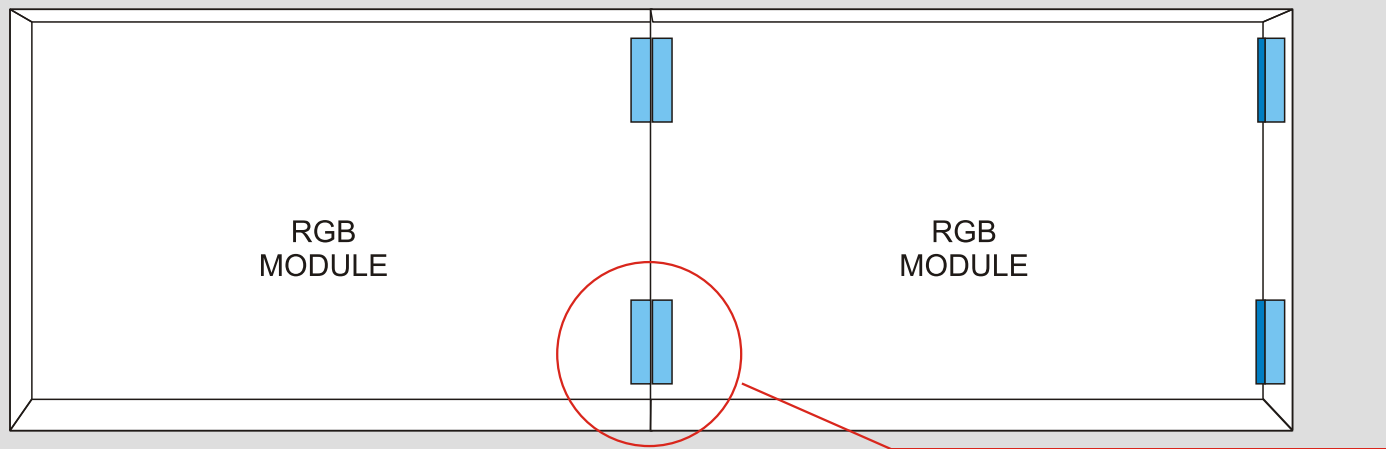

PolyComp (PTY) Ltd has been market leaders in the design and manufacturing of high quality LED displays since 1985
We are the suppliers of choice to most European, African and Asian Markets.

52 Angus Crescent, Longmeadow Business Park East, Modderfontein South Africa
Tel: +27 11 608-2770 Email: admin@polycomp.co.za
Fax: +27 11 608-2774 Websites: www.polycomp.co.za, www.polycomp-displays.com

LED BANNER - MODULE SPECIFICATIONS

LED Banner

- Dimensions: 2560mm x 960mm
- Resolution: 128 x 48 pixels
- Pitch: Actual - 20mm
Virtual - 10mm
- Cluster: 2Red + 1Pure Green + 1 blue
- Luminosity: 9000 NIT (AVG)
- Viewing Angles: 130deg x 70deg
- No of Colours: 16 Billion
- Dimming Levels: 48
- Frame Refresh Rate: 400Hz
- Weight: \pm 30kg per module
- Power: Each Module: 220V ac 14 Amp (Max)
- Adjustable floor/ground brackets
- Controller: PC & Application Software to schedule advertising clips, Adjustable Duration & Repetition
- Input: Image Formats: BMP, JPG
Video Formats: MPG, MPEG, WMV, AVI, SWF, ASF

(Notice: Video function depends on control system. Scrolling text marquee)